


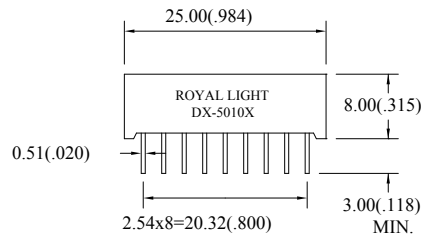





Dual Digits Display

Digit Size	Part No.		Chip		Wave Length λp(nm)	Absolute Maximun Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		λ nm	Pd nW	If mA	If Peak	Vf(V)		Iv(μcd)	
										Typ.	Max.	Typ.	
0.5" Dual Digits	DC-5010H	DA-5010H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	650	DD-38
	DC-5010E	DA-5010E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	2000	
	DC-5010G	DA-5010G	GaP	Green	565	30	100	30	160	2.1	2.8	2000	
	DC-5010Y	DA-5010Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1600	
	DC-5010SR	DA-5010SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	
0.5" Dual Digits	DC-5011H	DA-5011H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	650	DD-39
	DC-5011E	DA-5011E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	2000	
	DC-5011G	DA-5011G	GaP	Green	565	30	100	30	160	2.1	2.8	2000	
	DC-5011Y	DA-5011Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1600	
	DC-5011SR	DA-5011SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	


DD-38

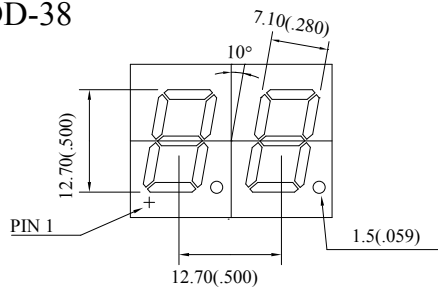





DC-5010X

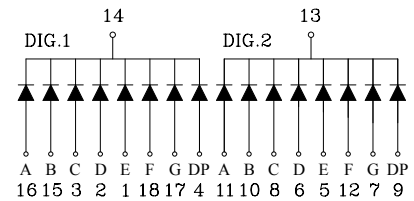


DA-5010X

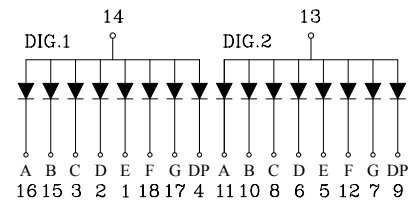


DD-39

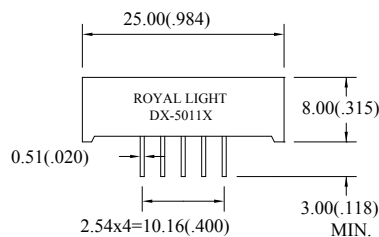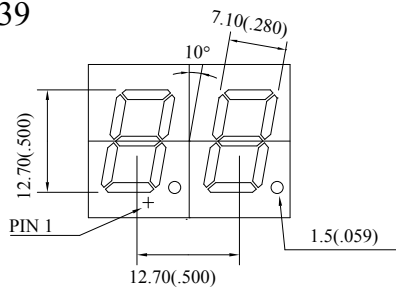

DC-5011X

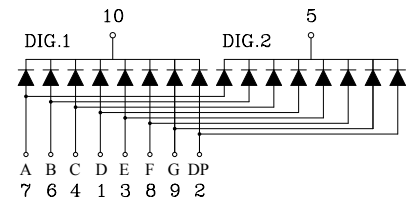

DA-5011X

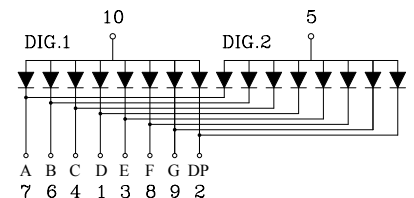

NOTES: 1.All Dimensions are in millimeters (inches).
2.Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise specified.