






Dual Digits Display

Digit Size	Part No.		Chip		Wave Length λp(nm)	Absolute Maximun Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		λ nm	Pd nW	If mA	If Peak	Vf(V)		Iv (μcd)	
										Typ.	Max.	Typ.	
0.4" Dual Digits	DC-4010H	DA-4010H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	650	DD-36
	DC-4010E	DA-4010E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	2000	
	DC-4010G	DA-4010G	GaP	Green	565	30	100	30	160	2.1	2.8	2000	
	DC-4010Y	DA-4010Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1600	
	DC-4010SR	DA-4010SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	10000	
0.4" Dual Digits	DC-4011H	DA-4011H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	650	DD-37
	DC-4011E	DA-4011E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	2000	
	DC-4011G	DA-4011G	GaP	Green	565	30	100	30	160	2.1	2.8	2000	
	DC-4011Y	DA-4011Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1600	
	DC-4011SR	DA-4011SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	10000	


DD-36

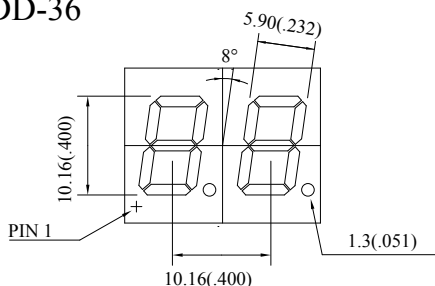



DC-4010X

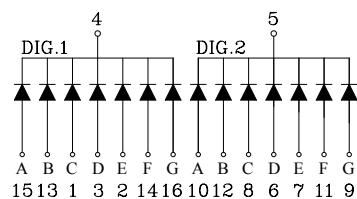


DA-4010X

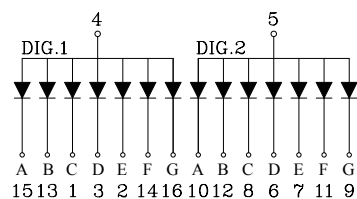


DD-37

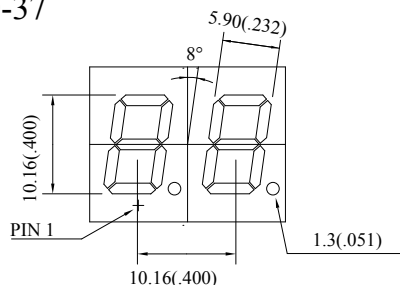

DC-4011X

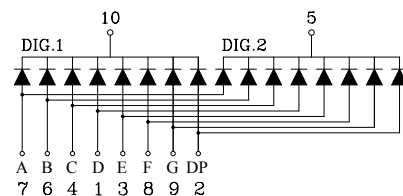

DA-4011X

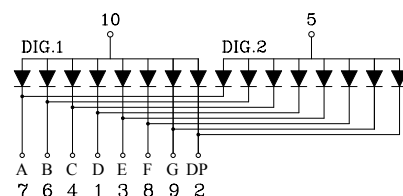

NOTES: 1. All Dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise specified.