





Three Digits Display

Digit Size	Part No.		Chip		Wave Length l p (nm)	Absolute Maximun Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		$\Delta\lambda$ nm	Pd nW	If mA	If Peak	Vf(V)		Iv(μcd)	
										Typ.	Max.	Typ.	
0.3" Three Digits	TC-3010H	TA-3010H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	550	DD-48
	TC-3010E	TA-3010E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	1800	
	TC-3010G	TA-3010G	GaP	Green	565	30	100	30	160	2.1	2.8	1600	
	TC-3010Y	TA-3010Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1500	
	TC-3010SR	TA-3010SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	5000	


DD-48

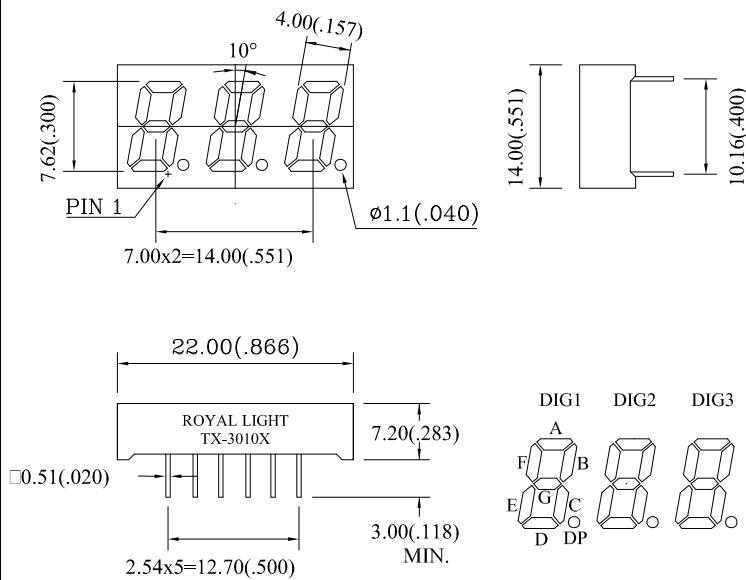

TC-3010X

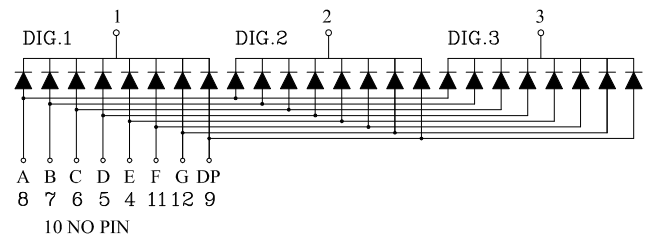

TA-3010X

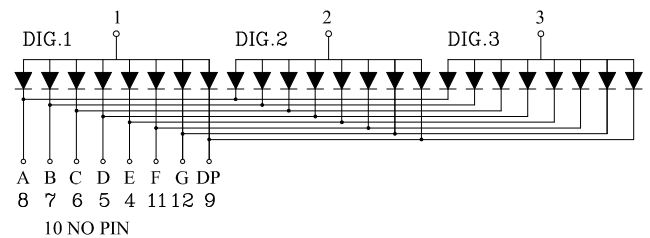

NOTES: 1.All Dimensions are in millimeters (inches).
2.Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise specified.