




PART NO:SLS-177077A-08W

Mechanical Dimensions

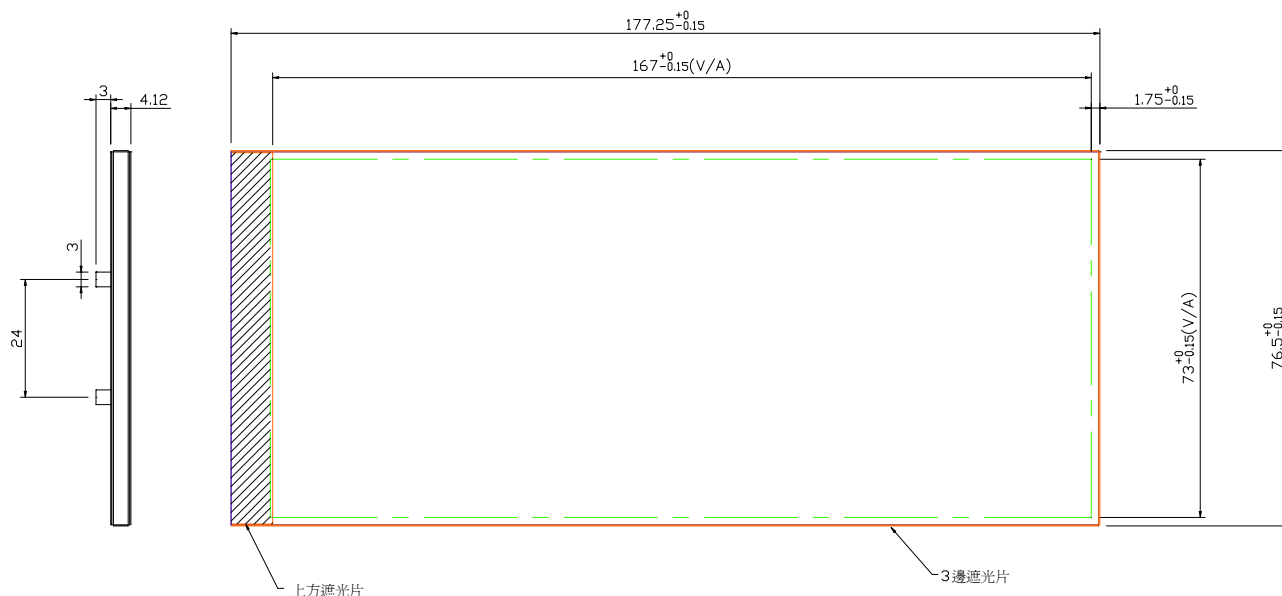

Note: Dimension in millimeters, and tolerance is ± 0.35 unless otherwise noted.

*8 X 1 = 8 (Dice Numbers)

*Absolute Maximum Rating

Parameter	Symbol	Rating
Peak Forward Current	I_F	240mA
Reverse Voltage	V_R	5V
Power Dissipation	P_O	1.2(W)
Operating Temperature	T_{opr}	-20 to +70(°C)
Storage Temperature	T_{stg}	-30 to +80(°C)

Uniformity=70%