


PART NO:SLS-177077A-08B

Mechanical Dimensions

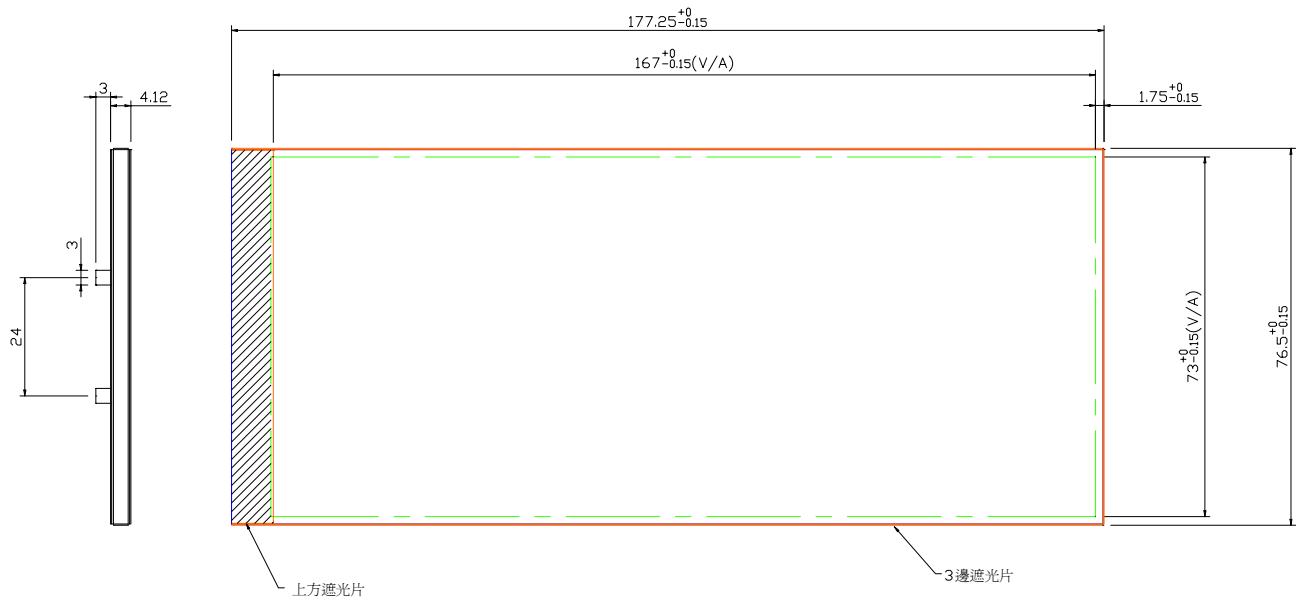

Note: Dimension in millimeters, and tolerance is ± 0.35 unless otherwise noted.

***8 X 1 = 8** (Dice Numbers)

*Absolute Maximum Rating

Parameter	Symbol	Rating
Peak Forward Current	I _F	240mA
Reverse Voltage	V _R	5V
Power Dissipation	P _O	1.2(W)
Operating Temperature	T _{opr}	-20 to +70(°C)
Storage Temperature	T _{stg}	-30 to +80(°C)

Uniformity =70%