





Single Digit Display

Digit Size	Part No.		Chip		Wave Length λ_p (nm)	Absolute Maximun Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		$\Delta \lambda$ nm	Pd nW	If mA	If Peak	Vf(V)		Iv (μ cd)	
										Typ.	Max.	Typ.	
1.5" Single Digit	SC-15010H	SA-15010H	GaP	Bright Red	700	90	45	15	50	4.2	5.6	1200	DD-25
	SC-15010E	SA-15010E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	4.0	5.6	4200	
	SC-15010G	SA-15010G	GaP	Green	565	30	100	30	160	4.2	5.6	4000	
	SC-15010Y	SA-15010Y	GaAsP/Gap	Yellow	585	30	100	30	160	4.2	5.6	3200	
	SC-15010SR	SA-15010SR	GaAlAs	Super Red	660	20	60	20	160	3.6	4.8	40000	
1.5" Single Digit	SC-15020H	SA-15020H	GaP	Bright Red	700	90	45	15	50	4.2	5.6	1200	DD-26
	SC-15020E	SA-15020E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	4.0	5.6	4200	
	SC-15020G	SA-15020G	GaP	Green	565	30	100	30	160	4.2	5.6	4000	
	SC-15020Y	SA-15020Y	GaAsP/Gap	Yellow	585	30	100	30	160	4.2	5.6	3200	
	SC-15020SR	SA-15020SR	GaAlAs	Super Red	660	20	60	20	160	3.6	4.8	40000	


DD-25

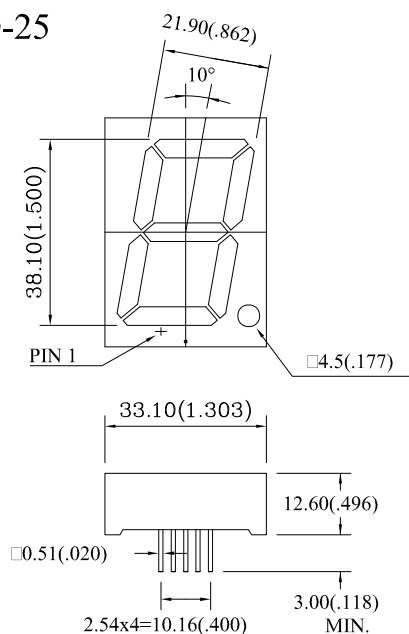


SC-15010X




SA-15010X




DD-26

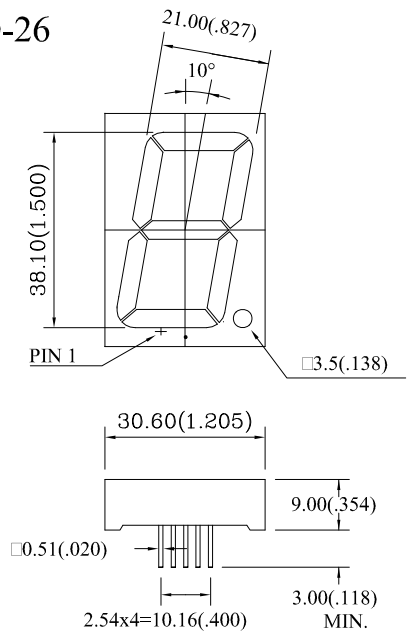

SC-15020X



SA-15020X



NOTES: 1.All Dimensions are in millimeters (inches).
2.Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise specified.