








Single Digit Display

Digit Size	Part No.		Chip		Wave Length λ p(nm)	Absolute Maximun Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		$\triangle \lambda$ nm	Pd nW	If mA	If Peak	Vf(V)		Iv(μ cd)	
										Typ.	Max.	Typ.	
4.0" Single Digit	SC-40010H	SA-40010H	GaP	Bright Red	700	90	45	15	50	10.5	12.5	4000	DD-30
	SC-40010E	SA-40010E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	10.0	12.5	9000	
	SC-40010G	SA-40010G	GaP	Green	565	30	100	30	160	10.5	12.5	8000	
	SC-40010Y	SA-40010Y	GaAsP/Gap	Yellow	585	30	100	30	160	10.5	12.5	8000	
	SC-40010SR	SA-40010SR	GaAlAs	Super Red	660	20	60	20	160	9.5	10.5	50000	


DD-30

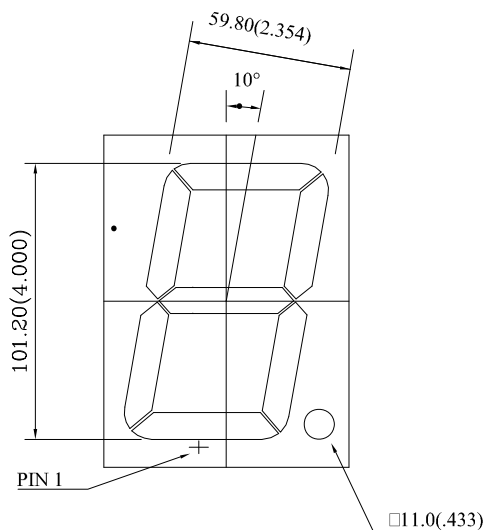

SC-40010X

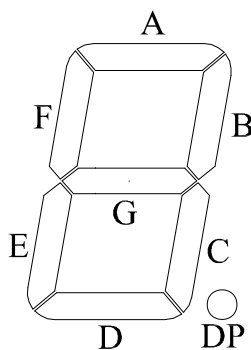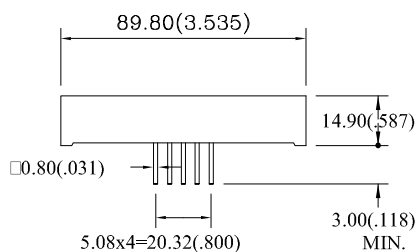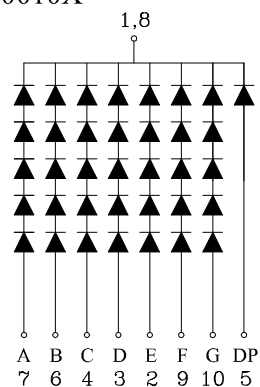

SA-40010X

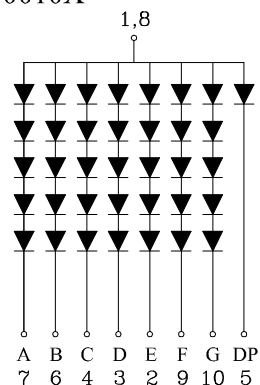

NOTES: 1.All Dimensions are in millimeters (inches).
2.Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise specified.