




Dual Digits Display

Digit Size	Part No.		Chip		Wave Length λ (nm)	Absolute Maximun Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		□λ nm	Pd nW	If mA	If Peak	Vf(V)		Iv(μcd)	
										Typ.	Max.	Typ.	
0.52" Dual Digits	DC-5210H	DA-5210H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	650	DD-40
	DC-5210E	DA-5210E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	2000	
	DC-5210G	DA-5210G	GaP	Green	565	30	100	30	160	2.1	2.8	2000	
	DC-5210Y	DA-5210Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1600	
	DC-5210SR	DA-5210SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	




DD-40

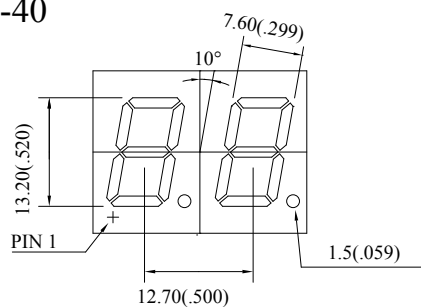

DC-5210X

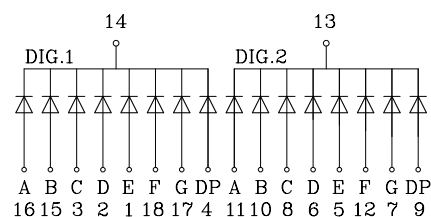

DA-5210X

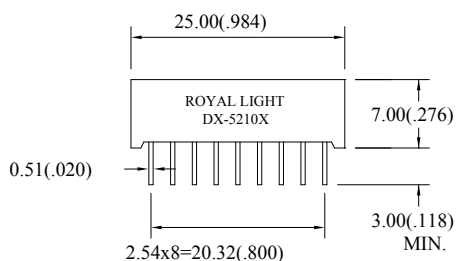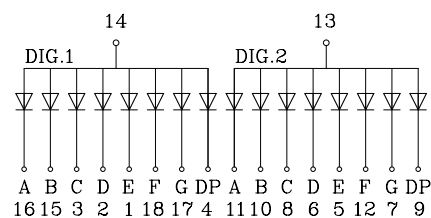

NOTES: 1.All Dimensions are in millimeters (inches).

2.Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise specified.