




ROYAL LIGHT ELECTRONICS CO., LTD.

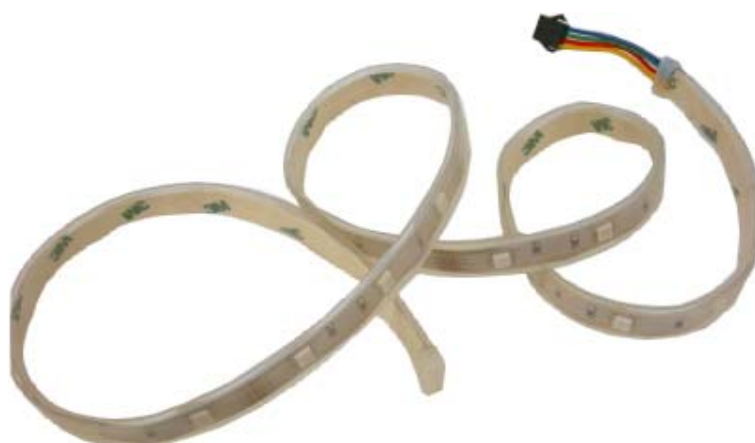

R30RGB-12V

Technical Specification

Technical Specification

Description

Adopts chips from Lumileds, Cree etc-internationally famous large manufactures as light sources. With 0.15mm super-thin FPC as the base PCB, randomly flexible and installing. Four-wire connection, fixing&installing accessories included, convenient&simple installation and maintenance. High illumination, large scattering angle, pure colors, stable fuction. Low voltage, low consumption, free maintenance. Three-piece LEDs as a basic unit, each unit is randomly detachable. Widely used in super-thin channel letters, outline shaping etc.

Specification

ITEM	Parameter	Description
Input Voltage	12V	
LED Qty	30 Pieces	
Product Size each	(1M*15mm)	
Luminous Flux	65 lm	
Beam Angle	120°	
消耗功率(max)	7.5W/1M	
工作溫度	-20℃ ~ 50℃	
Defend Grade	IP67	
Q'ty per Case	5	

七彩控制器(選購)

ITEM	Parameter	Description
Input Voltage	12V	
總電流	2.55A	
最大功率	30W	

七彩控制器:可調整 LED 發光顏色 , 並切換自動混色