



本規格書為 **LED SMD** 產品型號：ST-505015YCGHD3V-D0 相關規格

產品規格：

Emitted color : Green

Lens Color : Water Clear

Dice : InGaN

Absolute Maximum Ratings (Tj = 25°C)

Parameter	Value	Unit
Power Dissipation	110	mW
Continuous Forward Current	25	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	80	mA
Reverse Voltage	5	V
Operating Temperature Range	-30to +85	°C
Storage Temperature Range	-40to +100	°C
Lead Solder Temperature	260°C for 5 seconds	

Electrical-Optical Characteristics (Tj = 25°C)

Parameter	Symbol	MIN	TYP	MAX	UNIT	TEST CONDITION
Forward Voltage	VF		3.2	3.6	V	If=20mA
Wavelength	λ_d	520	528	536	nm	
Reverse Current	IR			10	μA	VR=5V
Luminous Intensity	IV				mcd	If=20mA
Recommend Forward Current	If(Rec)			25	mA	
Full Viewing Angle	$2\theta_{1/2}$		120		deg	If=20mA



LUMINOUS INTENSITY GROUPS:

LUMINOUS INTENSITY GROUPS :

ST-505015YCGHD3V-D0	
Rank	Iv(mcd)
U2	1300-1650
U3	1650-2050
U4	2050-2500
W1	2500-3000
W2	3000-3600
W3	3600-4250

WAVELENGTH GROUPS :

ST-505015YCGHD3V-D0	
Rank	λ d (nm)
G12	520-524
G23	522-526
G34	524-528
G45	526-530
G56	528-532
G67	530-534
G78	532-536







ROYAL LIGHT ELECTRONICS CO., LTD.

OUTLINE DIMENSIO

TOLERANCE :0.2

UNIT : mm

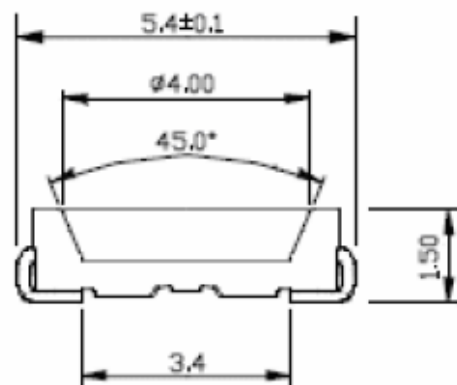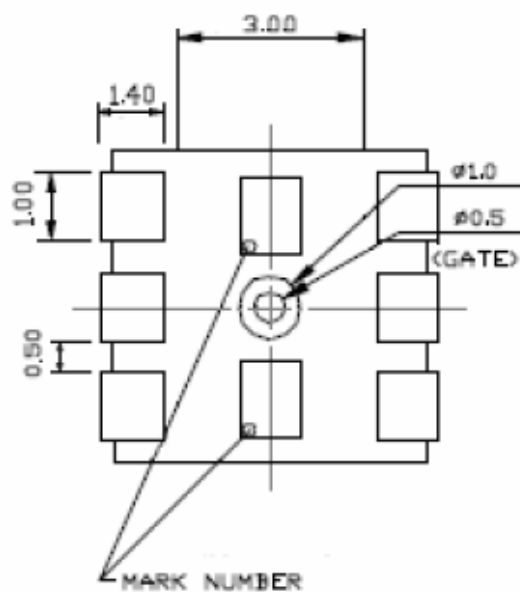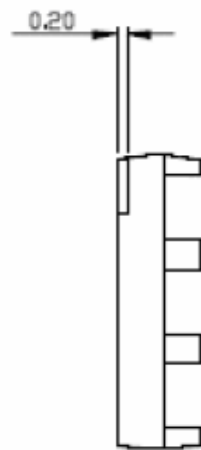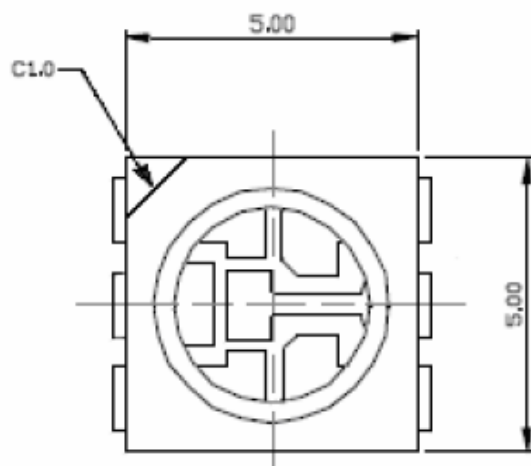

Note:

1. Unit: mm
2. Tolerance: Dimension ± 0.1 / Angle $\pm 0.5^\circ$

www.royal-light.com.tw

E-mail: sales@royal-light.com.tw