






Three Digits Display

Digit Size	Part No.		Chip		Wave Length λp(nm)	Absolute Maximun Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		Δλ nm	Pd nW	If mA	If Peak	Vf(V)		Iv(μcd)	
										Typ.	Max.	Typ.	
0.4" Three Digits	TC-4010H	TA-4010H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	550	DD-50
	TC-4010E	TA-4010E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	1800	
	TC-4010G	TA-4010G	GaP	Green	565	30	100	30	160	2.1	2.8	1600	
	TC-4010Y	TA-4010Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1500	
	TC-4010SR	TA-4010SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	
0.4" Three Digits	TC-4011H	TA-4011H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	550	DD-51
	TC-4011E	TA-4011E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	1800	
	TC-4011G	TA-4011G	GaP	Green	565	30	100	30	160	2.1	2.8	1600	
	TC-4011Y	TA-4011Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1500	
	TC-4011SR	TA-4011SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	


DD-50

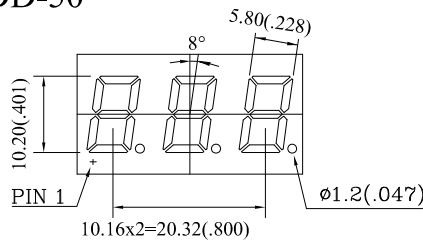


TC-4010X

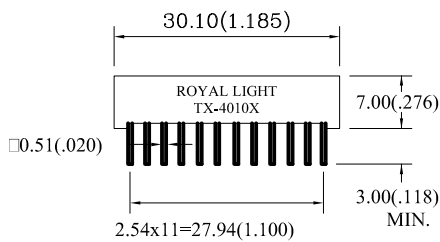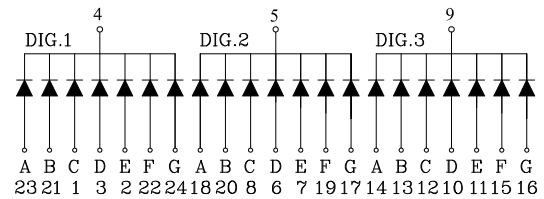



TA-4010X

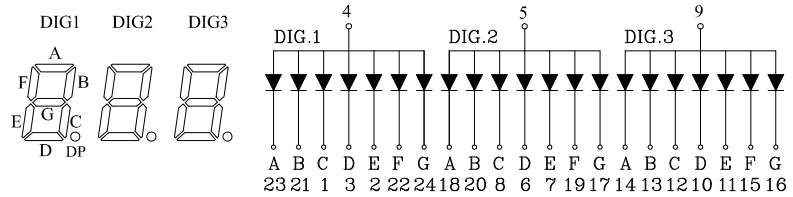


DD-51

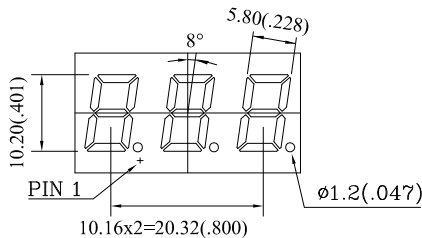

TC-4011X

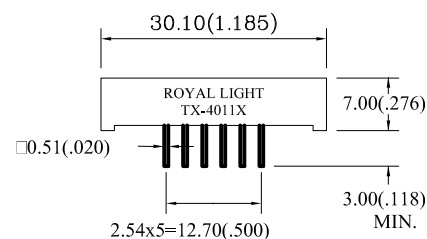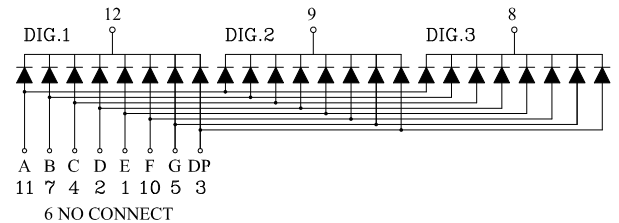

TA-4011X

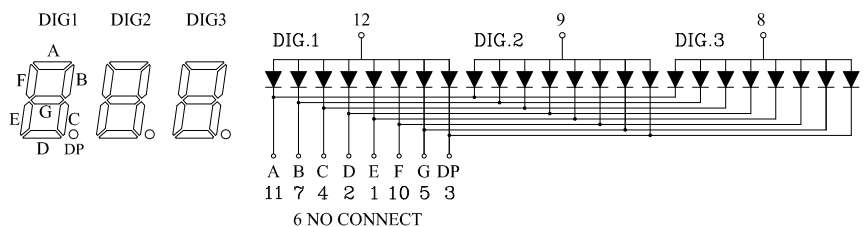

NOTES: 1.All Dimensions are in millimeters (inches).
2.Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise specified.