





Dual Digits Display

Digit Size	Part No.		Chip		Wave Length λ p(nm)	Absolute Maximun Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		λ nm	Pd nW	If mA	If Peak	Vf(V)		Iv(μcd)	
										Typ.	Max.	Typ.	
0.8" Dual Digits	DC-8010H	DA-8010H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	700	DD-45
	DC-8010E	DA-8010E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	3000	
	DC-8010G	DA-8010G	GaP	Green	565	30	100	30	160	2.1	2.8	3000	
	DC-8010Y	DA-8010Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	3000	
	DC-8010SR	DA-8010SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	
0.8" Dual Digits	DC-8011H	DA-8011H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	700	DD-46
	DC-8011E	DA-8011E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	3000	
	DC-8011G	DA-8011G	GaP	Green	565	30	100	30	160	2.1	2.8	3000	
	DC-8011Y	DA-8011Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	3000	
	DC-8011SR	DA-8011SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	
0.8" Dual Digits	DC-8020H	DA-8020H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	700	DD-47
	DC-8020E	DA-8020E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	3000	
	DC-8020G	DA-8020G	GaP	Green	565	30	100	30	160	2.1	2.8	3000	
	DC-8020Y	DA-8020Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	3000	
	DC-8020SR	DA-8020SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	


DD-45

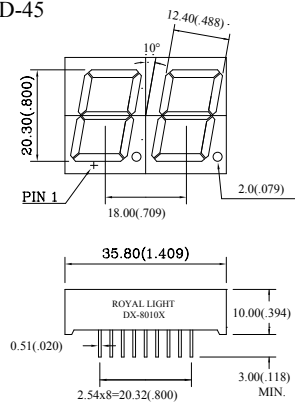


DC-8010X




DA-8010X

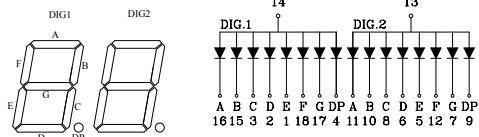


DD-46

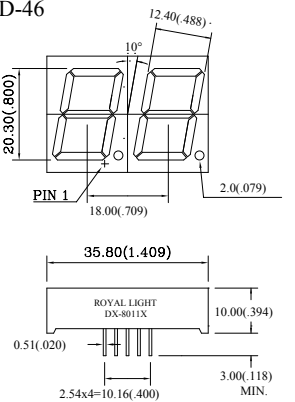


DC-8011X




DA-8011X

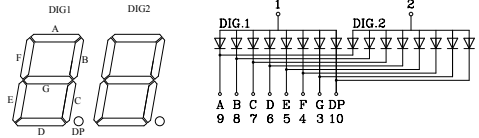


DD-47

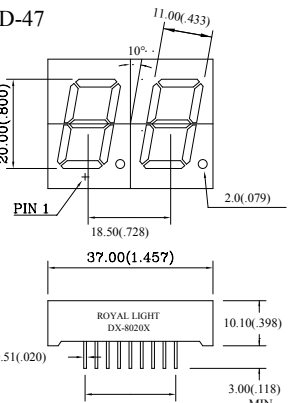

DC-8020X



DA-8020X

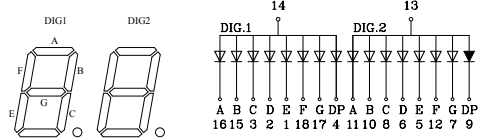

NOTES: 1.All Dimensions are in millimeters (inches).
2.Tolerance is ±0.25mm(.010") unless otherwise specified.