



Clock Display

Digit Size	Part No.		Chip		Wave Length λp (nm)	Absolute Maximun Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		Δλ nm	Pd nW	If mA	If Peak	Vf(V)		Iv(μcd)	
										Typ.	Max.	Typ.	
0.56" Four Digits	CC-5610H	CA-5610H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	700	DD-70
	CC-5610E	CA-5610E	GaAsP/Gap	Hi.effi Red	635	45	100	30	160	2.0	2.8	2000	
	CC-5610G	CA-5610G	GaP	Green	565	30	100	30	160	2.1	2.8	2000	
	CC-5610Y	CA-5610Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1600	
	CC-5610SR	CA-5610SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	


DD-70

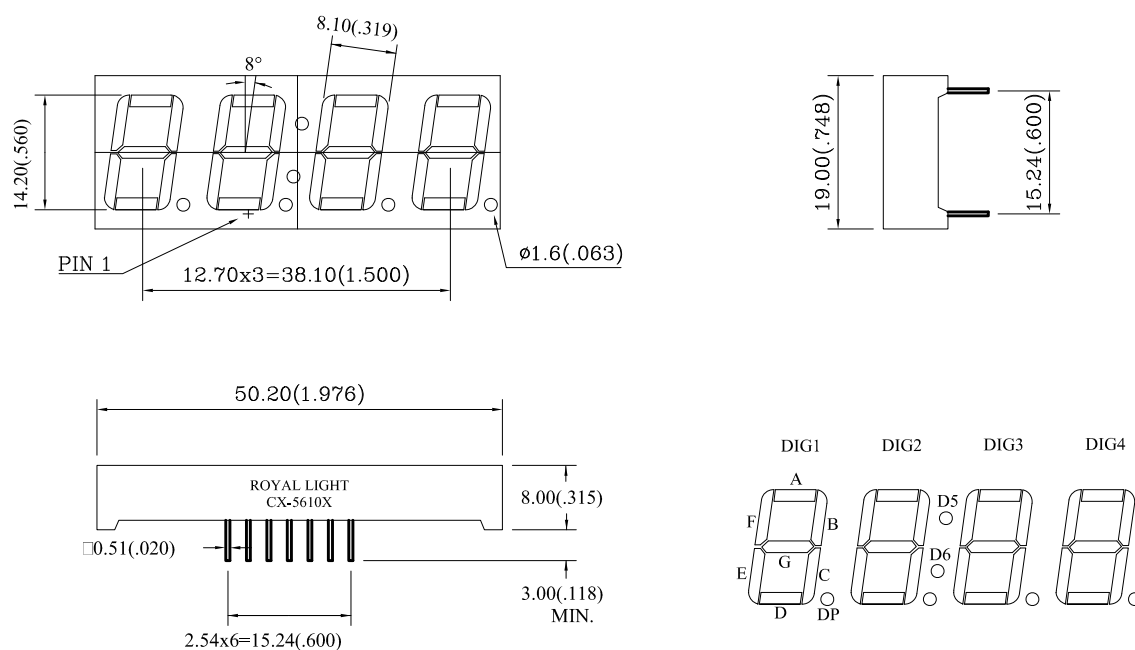

CC-5610X

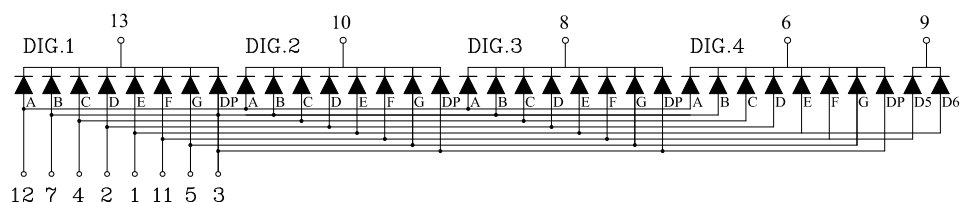

CA-5610X

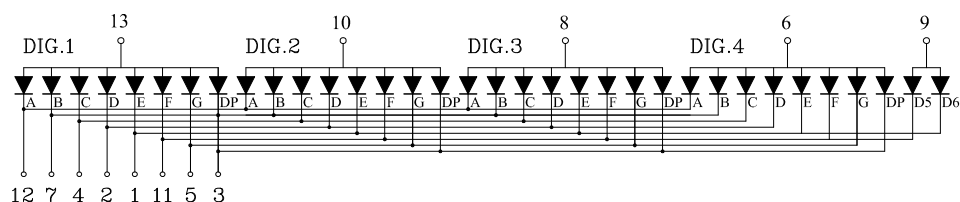

NOTES: 1.All Dimensions are in millimeters (inches).
2.Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise specified.