




Three Digits Display

Digit Size	Part No.		Chip		Wave Length λp(nm)	Absolute Maximum Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		Δλ nm	Pd nW	If mA	If Peak	Vf(V)		Iv(mA)	
										Typ.	Max.	Typ.	
0.56" Three Digits	TC-5610H	TA-5610H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	650	DD-54
	TC-5610E	TA-5610E	GaAsP/GaP	Hi.eff Red	635	45	100	30	160	2.0	2.8	2000	
	TC-5610G	TA-5610G	GaP	Green	565	30	100	30	160	2.1	2.8	2000	
	TC-5610Y	TA-5610Y	GaAsP/GaP	Yellow	585	30	100	30	160	2.1	2.8	1600	
	TC-5610SR	TA-5610SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	
0.56" Three Digits	TC-5611H	TA-5611H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	650	DD-55
	TC-5611E	TA-5611E	GaAsP/GaP	Hi.eff Red	635	45	100	30	160	2.0	2.8	2000	
	TC-5611G	TA-5611G	GaP	Green	565	30	100	30	160	2.1	2.8	2000	
	TC-5611Y	TA-5611Y	GaAsP/GaP	Yellow	585	30	100	30	160	2.1	2.8	1600	
	TC-5611SR	TA-5611SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	


DD-54

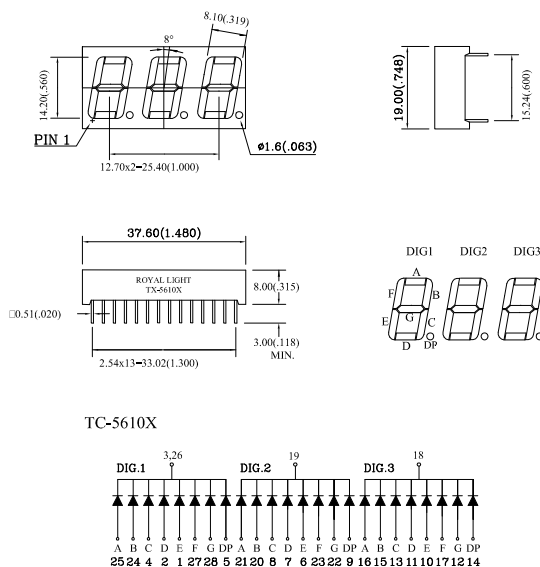

TC-5610X

TA-5610X

DD-55

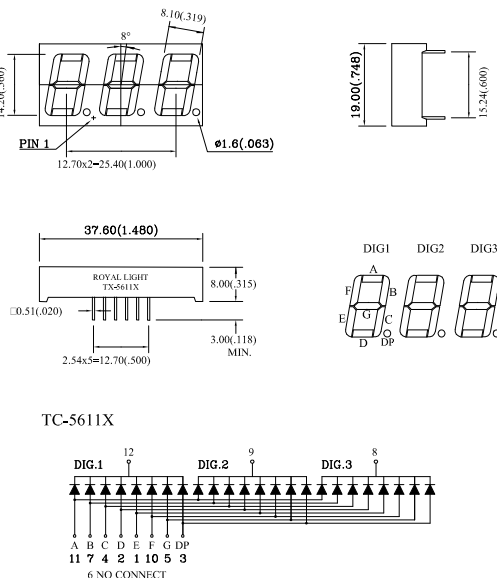

TC-5611X

TA-5611X