




Three Digits Display

Digit Size	Part No.		Chip		Wave Length λ(pnm)	Absolute Maximun Ratings				Electro-Optical Characteristics			Figure No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		Δλ nm	Pd nW	If mA	If Peak	Vf(V)		Iv(μcd)	
										Typ.	Max.	Typ.	
0.56" Three Digits	TC-5620H	TA-5620H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	650	DD-56
	TC-5620E	TA-5620E	GaAsP/Gap	Hi. effi Red	635	45	100	30	160	2.0	2.8	2000	
	TC-5620G	TA-5620G	GaP	Green	565	30	100	30	160	2.1	2.8	2000	
	TC-5620Y	TA-5620Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1600	
	TC-5620SR	TA-5620SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	
0.56" Three Digits	TC-5621H	TA-5621H	GaP	Bright Red	700	90	45	15	50	2.1	2.8	650	DD-57
	TC-5621E	TA-5621E	GaAsP/Gap	Hi. effi Red	635	45	100	30	160	2.0	2.8	2000	
	TC-5621G	TA-5621G	GaP	Green	565	30	100	30	160	2.1	2.8	2000	
	TC-5621Y	TA-5621Y	GaAsP/Gap	Yellow	585	30	100	30	160	2.1	2.8	1600	
	TC-5621SR	TA-5621SR	GaAlAs	Super Red	660	20	60	20	160	1.8	2.4	21000	

DD-56

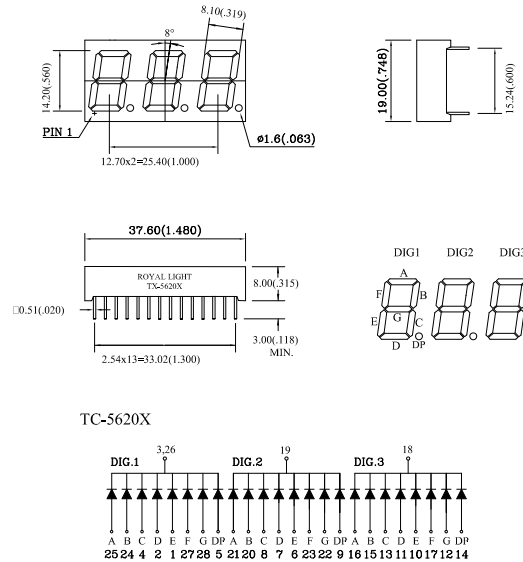

DD-57

